


GOOD NIGHT

High Output Profiles



GOOD NIGHT


Recessed

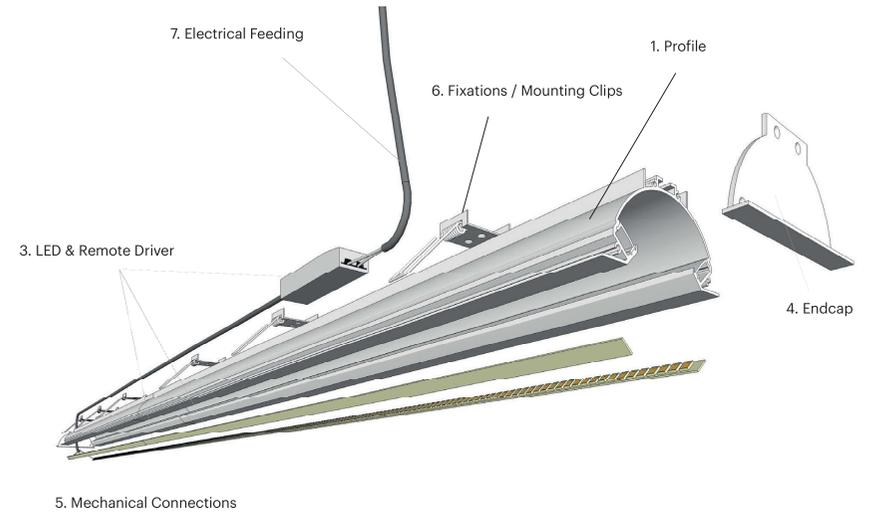

Dimensions

Finish

Mounting



- 10 White
- 30 Aluminium



Recessed

### Mitis

MITIS is a recessed system that achieves the softness and the visual comfort that we are rarely able to get with the usual models in the market. Its soft light, which can be warm or cool depending on our mood, gives us high quality light and at the same time, aesthetics that allow us to play around with interior design. With its different power settings plus its double light system, we can achieve effects that are both highly visual and able to give us the peace-and-quiet feeling that we so often look for.



## 1. Profile

Reference	Description	Mounting	Finish
451.00.10.M	Mitis	Recessed	○ 10 White
451.00.30.M			● 30 Aluminium



## 2. Cover

Internal diffuser included.

## 3. LED &amp; Driver

Reference	Wattage	LED Lm Output	CCT	CRI	Driver	Dimming
451.05.1000.30.NDI.M	2x15 W/m	2x1.000 lm/m	3.000K	>80	Remote driver included	NDI Non-dimmable
451.05.1000.40.NDI.M	2x15 W/m	2x1.000 lm/m	4.000K	>80	Remote driver included	NDI Non-dimmable
451.05.2000.30.NDI.M	2x24 W/m	2x2.000 lm/m	3.000K	>80	Remote driver included	NDI Non-dimmable
451.05.2000.40.NDI.M	2x24 W/m	2x2.000 lm/m	4.000K	>80	Remote driver included	NDI Non-dimmable
451.05.1000.30.D10.M	2x15 W/m	2x1.000 lm/m	3.000K	>80	Remote driver included	1-10V dimm
451.05.1000.40.D10.M	2x15 W/m	2x1.000 lm/m	4.000K	>80	Remote driver included	1-10V dimm
451.05.2000.30.D10.M	2x24 W/m	2x2.000 lm/m	3.000K	>80	Remote driver included	1-10V dimm
451.05.2000.40.D10.M	2x24 W/m	2x2.000 lm/m	4.000K	>80	Remote driver included	1-10V dimm
451.05.1000.30.DAL.M	2x15 W/m	2x1.000 lm/m	3.000K	>80	Remote driver included	DALI dimm
451.05.1000.40.DAL.M	2x15 W/m	2x1.000 lm/m	4.000K	>80	Remote driver included	DALI dimm
451.05.2000.30.DAL.M	2x24 W/m	2x2.000 lm/m	3.000K	>80	Remote driver included	DALI dimm
451.05.2000.40.DAL.M	2x24 W/m	2x2.000 lm/m	4.000K	>80	Remote driver included	DALI dimm

RGB available upon request

\*Custom configuration available upon request

## 4. Endcap

Reference	Description	Finish
451.11.10	End cap (2 units)	○ 10 White
451.11.30	End cap (2 units)	● 30 Aluminium



## 5. Mechanical Connections

Reference	Description
451.31	180° linear connection (when longer than 2'5m)
451.32	90° connection
451.33.XXX	Custom connection

## 6. Fixations / Mounting Kits

Reference	Description
451.23	Recessed kit (1 unit / 1'5m)



## 7. Electrical Feeding

Reference	Description
451.43	Recessed mounting