















VERSATILE S and R, with the FLAT and OUT diffuser, consists of 2 interchangeable models and diffusers for just one versatile concept, as its name indicates. Either recessed (R), surface mounted or suspended (S), with the same design and with only the variation of a tiny frame for the recessed one, they all equally adapt to 2 diffusers that achieve very different looks, that can be both discrete (FLAT) or much more visual (OUT). The VERSATILE system achieves functionality and at the same time is practical, easy to install, and can be part of many day-to-day projects.

 INDOOR	 SURFACE	 PENDANT	 WALL SURFACE
 WIRELESS	 ALEXA, SIRI, GOOGLE	 DIMMABLE	 CASAMBI
 SPECIAL LED FOOD AND OTHERS	 OTHER COLOUR TEMPERATURE	 BIODYNAMIC	 DIGITAL RGB
		 RGB	


Dimensions

Finish

Mounting




- 10 White
- 20 Black
- 30 Aluminium




Dimensions

Finish

Mounting



- 10 White
- 20 Black
- 30 Aluminium






Versatile-s Flat

Versatile-s Out


1. Profile

Reference	Description	Mounting	Finish
453.00.10.M	Versatile-s	Surface / Pendant	○ 10 White
453.00.20.M			● 20 Black
453.00.30.M			● 30 Aluminium



2. Cover

Reference	Description
453.01.01.M	Flat opal diffuser
453.01.02.M	Flat Microprismatic diffuser
453.02.01.M	Out opal diffuser



3. LED & Driver

Reference	Wattage	LED Lumen Output	CCT	CRI	Driver	Dimming
453.05.1000.27.NDI.M	15 W/m	1.000 lm/m	2.700K	>90	Driver included	NDI Non-dimmable
453.05.1000.30.NDI.M	15 W/m	1.000 lm/m	3.000K	>90	Driver included	NDI Non-dimmable
453.05.1000.40.NDI.M	15 W/m	1.000 lm/m	4.000K	>90	Driver included	NDI Non-dimmable
453.05.2000.27.NDI.M	24 W/m	2.000 lm/m	2.700K	>90	Driver included	NDI Non-dimmable
453.05.2000.30.NDI.M	24 W/m	2.000 lm/m	3.000K	>90	Driver included	NDI Non-dimmable
453.05.2000.40.NDI.M	24 W/m	2.000 lm/m	4.000K	>90	Driver included	NDI Non-dimmable
453.05.3500.27.NDI.M	24 W/m HE	3.500 lm/m	2.700K	>90	Driver included	NDI Non-dimmable
453.05.3500.30.NDI.M	24 W/m HE	3.500 lm/m	3.000K	>90	Driver included	NDI Non-dimmable
453.05.3500.40.NDI.M	24 W/m HE	3.500 lm/m	4.000K	>90	Driver included	NDI Non-dimmable
453.05.1000.27.D10.M	15 W/m	1.000 lm/m	2.700K	>90	Driver included	1-10V dimm
453.05.1000.30.D10.M	15 W/m	1.000 lm/m	3.000K	>90	Driver included	1-10V dimm
453.05.1000.40.D10.M	15 W/m	1.000 lm/m	4.000K	>90	Driver included	1-10V dimm
453.05.2000.27.D10.M	24 W/m	2.000 lm/m	2.700K	>90	Driver included	1-10V dimm
453.05.2000.30.D10.M	24 W/m	2.000 lm/m	3.000K	>90	Driver included	1-10V dimm
453.05.2000.40.D10.M	24 W/m	2.000 lm/m	4.000K	>90	Driver included	1-10V dimm
453.05.3500.27.D10.M	24 W/m HE	3.500 lm/m	2.700K	>90	Driver included	1-10V dimm
453.05.3500.30.D10.M	24 W/m HE	3.500 lm/m	3.000K	>90	Driver included	1-10V dimm
453.05.3500.40.D10.M	24 W/m HE	3.500 lm/m	4.000K	>90	Driver included	1-10V dimm
453.05.1000.27.DAL.M	15 W/m	1.000 lm/m	2.700K	>90	Driver included	DALI dimm
453.05.1000.30.DAL.M	15 W/m	1.000 lm/m	3.000K	>90	Driver included	DALI dimm
453.05.1000.40.DAL.M	15 W/m	1.000 lm/m	4.000K	>90	Driver included	DALI dimm
453.05.2000.27.DAL.M	24 W/m	2.000 lm/m	2.700K	>90	Driver included	DALI dimm
453.05.2000.30.DAL.M	24 W/m	2.000 lm/m	3.000K	>90	Driver included	DALI dimm
453.05.2000.40.DAL.M	24 W/m	2.000 lm/m	4.000K	>90	Driver included	DALI dimm
453.05.3500.27.DAL.M	24 W/m HE	3.500 lm/m	2.700K	>90	Driver included	DALI dimm
453.05.3500.30.DAL.M	24 W/m HE	3.500 lm/m	3.000K	>90	Driver included	DALI dimm
453.05.3500.40.DAL.M	24 W/m HE	3.500 lm/m	4.000K	>90	Driver included	DALI dimm

RGB available upon request
 *Custom configuration available upon request

4. Endcap

Reference	Description	Type	Finish
453.11.10	End cap (2 units)	Flat difusser	○ 10 White
453.11.20	End cap (2 units)	Flat difusser	● 20 Black
453.11.30	End cap (2 units)	Flat difusser	● 30 Aluminium
453.12.10	End cap (2 units)	Out difusser	○ 10 White
453.12.20	End cap (2 units)	Out difusser	● 20 Black
453.12.30	End cap (2 units)	Out difusser	● 30 Aluminium




5. Mechanical Connections

Reference	Description
453.31	180° linear connection (when longer than 2'5m)
453.32	90° connection
453.33.XXX	Custom connection


6. Fixations / Mounting Kits

Reference	Description
453.21	Surface clip (1 unit / 1'5m)
453.22	Suspension kit (1 unit / 1,5m) (length 2m)
453.25	Wall bracket (1 unit / 1'5m)



7. Electrical feeding & Internal Electrification

Reference	Description	Finish
453.42.10	Electrification for suspension mounting	○ 10 White
453.42.20	Electrification for suspension mounting	● 20 Black
453.42.30	Electrification for suspension mounting	● 30 Aluminium
453.41	Electrification for surface mounting	

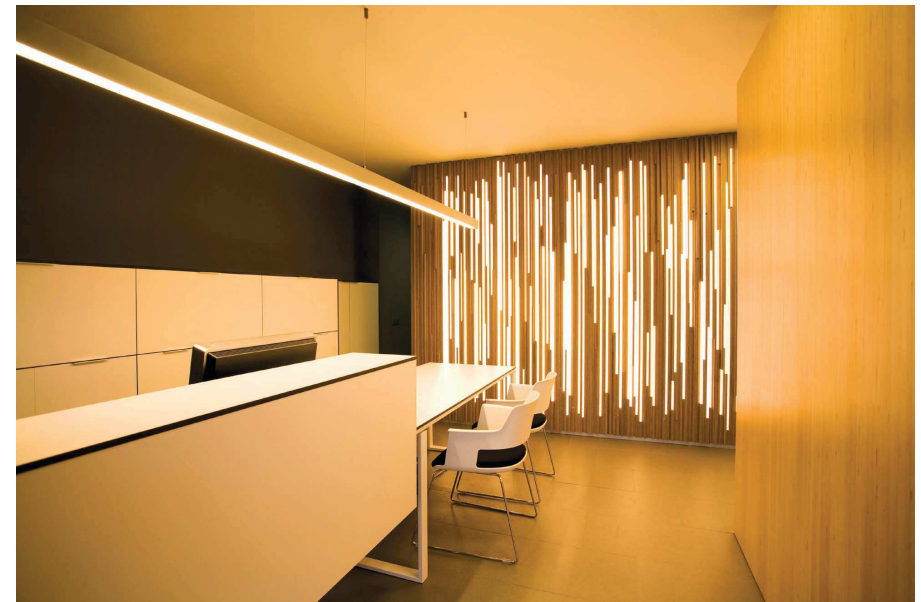

CLINICA DENTAL PONS / PROJECT: ESTUDI D'ARQUITECTURA INTERIOR MAITE PRATS